



# Closing units for double wire binding **K 45 a** and **K 45 c**



Pneumatic driven closing units for smaller to medium production runs and/or for finishing sample collections with double wire binding.



- Very strong model for the constant production in the book binding factory.
- Suitable for all products which are bound with double wire, even with calendar hanger or for skip-binding.
- Manual inserting of the cut binding element into the perforation.
- Positioning of the product at the higher side of the inserting plate.
- No tipping of the binding, because the product is fixed with the binding on the inserting plate.
- Pushing of the inserting plate into the closing unit.

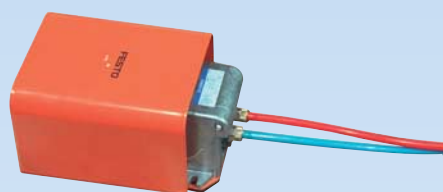

- For handling all binding diameters up to 1 1/4", independent of the pitch.
- Simple adjustment of the binding diameter by means of a hand wheel with no tools to chance.
- Pneumatic closing of the binding by pressing a foot pedal.



## Technical data

Binding diameter	3/16" to 1 1/4"
Compressed air requirement	6 litre/minute having max. 6 bar
<b>Model K 45 a</b>	
Working width	max. 540 mm
Required floor space	0,75 m x 0,60 m
Weight	55 kg
<b>Model K 45 c</b>	
Working width	max. 800 mm
Required floor space	1,00 m x 0,60 m
Weight	65 kg